


# WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6:		(11) International Publication Number: WO 97/41654
H04H 1/00, 1/08, H04L 12/16, 12/18, H04Q 7/20, H04B 7/26	A1	(43) International Publication Date: 6 November 1997 (06.11.97)
(21) International Application Number: PCT/AU (22) International Filing Date: 29 April 1997 (		CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL,
(30) Priority Data: PN 9550 29 April 1996 (29.04.96)	,	Published With international search report.
(71) Applicant (for all designated States except US): TAKTIEBOLAGET LM ERICSSON [SE/SE]; Tel S126 25 Stockholm (SE).  (72) Inventors' applicants (for US only): TSOUKAS, DESTRUCTION (SE).  (75) Inventors' Applicants (for US only): TSOUKAS, DESTRUCTION (SE).  (76) Inventors' Applicants (for US only): TSOUKAS, DESTRUCTION (SE).  (77) Inventors' Applicants (For US only): TSOUKAS, DESTRUCTION (SE).  (78) Inventors' Applicants (SE).  (79) Agent: CARTER SMITH & BEADLE; Qantas Railway Parade, Camberwell, VIC 3124 (AU).	Georgi Georgroy, V I/AU];	e. CC C2

### (54) Title: TELECOMMUNICATIONS INFORMATION DISSEMINATION SYSTEM



#### (57) Abstract

A method and system for disseminating information to subscribers of a mobile telecommunications network (30) from at leave information source (20) containing data which is updated continuously or at intervals. The system includes a message distribution centre (10) connected to at least one information source (20) and arranged to process the data to generate information messages share particular subscriber in accordance with a customer-defined profile of the subscriber, the information messages being instituted to the subscriber's mobile terminal (32) in the form of short message service (SMS) text messages. The information messages may be transmitted to the attribution of times, or upon the occurrence of a predetermined event or may be dependent upon the subscriber's location. A particular subscriber may also request information from the information source (20) at any time, from any location or based on an event and receive the information, as well as the above-mentioned information messages, in a menu-drivine format.

## FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT. LS Lesotho

AL	Albania	ES	Spain	LS	Lesotho	Sı	Slovenia
AM	Amenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	ΤJ	Tajikistan
BE	Belgium	GN	Guinca	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	17245	Republic of Macedonia	TR	
BG	Bulgaria	HU	Hungary	MI.	Mali		Turkey
BJ	Benin	180	Ireland	MN		TT	Trinidad and Tobago
BR	Brazil	iL	Israel	MR	Mongolia	UA	Ukraine
BY	Belanis	IS	Iceland	MW	Mauritania	UG	Uganda
CA	Canada	IT			Malawi	US	United States of Ameri
CF	Central African Republic	JP	Italy	MX	Mexico	UZ	Uzbekistan
CG	Congo	KE	Japan	NE	Niger	VN	Viet Nam
CH	Switzerland		Kenya	NL	Netherlands	YU	Yugoslavia
CI		KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

WO 97/41654 PCT/AU97/00260

5

10

15

20

25

30

1

### TELECOMMUNICATIONS INFORMATION DISSEMINATION SYSTEM

This invention relates to telecommunications information broadcast services and particularly, but not exclusively, relates to the dissemination of information to subscribers of a mobile telecommunications network.

Various information sources or databases contain data or information which is updated substantially continuously or at regular intervals, for instance stock-market databases, traffic information, sports information and betting services. Such information services, however deliver a continuous feed of information which cannot be tailored to a particular subscriber's requirements.

It is also possible for subscribers of a mobile telecommunications network to use a telecommunications service to access certain information in such databases. These services, however require the subscriber to initiate the delivery of the information, e.g. by a dial-up service.

International Patent Application No. PCT/CA94/00332 discloses a system for transmitting messages to screen-based devices, such as PCs, over a public switched telephone network (PSTN) and using stored program controlled switches (SPCS). A unique connection must be established, through the SPCS, to each screen-based device that is targeted for delivery of the messages. The messages are informational, promotional and/or advertisements that are based on consumer demographics or buying behaviour and are delivered non-intrusively to predetermined screen-based devices at particular intervals. After viewing a message, a consumer can contact a marketer directly to find out more information or order merchandise in the consumer's locality and the response is recorded as a statistic for the direct marketer. The disclosed system, however, does not provide information to a subscriber based on an event or on the user's location in accordance with the subscriber's profile which is stored and customised by the particular subscriber. Furthermore, real-time information is not provided intrusively to the subscriber based on an information source that is updated continuously.

It is therefore desirable to provide an enhanced telecommunications system for disseminating information to subscribers of the system in which at least some WO 97/41654 PCT/AU97/00260

2

of the disadvantages of known systems are alleviated.

5

10

20

25

30

It is also desirable to provide a method of, and apparatus for, disseminating information from at least one database which is updated substantially continuously to subscribers of a mobile telecommunications network.

It is further desirable to provide a system for disseminating information to subscribers of a mobile telecommunications network which can utilise existing network equipment.

According to one aspect of the invention there is provided a method of disseminating information from at least one information source containing data which is updated continuously or at intervals to subscribers of a telecommunications network comprising the steps of:

storing customer-defined profiles of subscribers of the network;

receiving, at a message distribution centre, data from said information source which is updated continuously or at intervals;

15 processing said data to produce information messages for particular subscribers in accordance with a stored customer-defined profile of each subscriber;

transmitting said information messages to particular subscribers in accordance with the stored customer-defined profile of each subscriber.

According to another aspect of the invention, there is provided a system for disseminating information to subscribers of a telecommunications network comprising a message distribution centre connected to or including at least one information source containing data which is updated substantially continuously or at intervals; a database of stored customer-defined profiles of subscribers of the network; wherein the message distribution centre includes service processing means for accessing the database of stored customer-defined profiles and arranged to process data from said at least one information source to generate information messages for a particular subscriber in accordance with the customer-defined profile of said subscriber; and message processing means for transmitting the information messages to the subscribers.

The information messages may be transmitted to particular subscribers at predetermined times and/or upon occurrence of predetermined events which are triggered in accordance with the customer-defined profile of each particular subscriber. The information messages may also be location dependent upon the location of the subscriber's mobile apparatus. For instance, a subscriber may request, in his or her customer profile, for time-dependant information messages, e.g. on particular stocks and shares, stock-market indices or currencies, or traffic alerts affecting a predetermined route, to be sent at predetermined times, e.g. at a certain hour each weekday. Alternatively, or additionally, the subscriber may request to receive event and/or location dependant information messages when a predetermined event occurs, or when the subscriber's mobile apparatus is at a particular location e.g. when a certain stock, index or exchange rate either reaches a certain value or fluctuates by a predetermined percentage or when a traffic alert occurs affecting the subscriber's route at a particular location. It will, however, be appreciated that the present invention is not limited to the dissemination of financial information such as stocks and shares, and may have other applications, for instance in providing betting services and information on sporting events.

10

15

20

25

30

The information messages are preferably transmitted via a mobile telecommunications network carrier to subscribers of the mobile network equipped with mobile terminals such as mobile telephones or pagers. The information messages are preferably transmitted in the form of SMS (Short Message Service) text messages. The SMS in a mobile telecommunications network enables a subscriber to receive a text message on a mobile terminal. Hitherto, the SMS facility in mobile terminals has been used to receive paged messages, but subscribers have not been able to receive information messages from information sources containing data which are constructed in accordance with a customer-defined profile of the subscriber.

According to a further aspect of the invention, there is provided apparatus for disseminating information from at least one information source containing data which is updated continuously or at intervals to subscribers of a mobile telecommunications network, comprising service processing means for receiving data from said at least one information source and for accessing a database of stored customer-defined profiles, said service processing means being arranged to

20

25

30

process data received from said at least one information source to generate information messages for a particular subscriber in accordance with the customer-defined profile of said subscriber; and message processing means for transmitting the information messages to the subscribers in the form of Short Message Service (SMS) text messages for reception by mobile terminals of the subscribers.

An information messages is preferably sent from the message processing means to a subscriber's terminal via a Short Message Service centre (SMS-C). In Australia and many other countries, most mobile telecommunications carriers use an Internationally recognised system for mobile telecommunications known as Global System for Mobiles (GSM), which provides the facility to send text messages, usually paging messages, to a subscriber. The present invention is applicable to the SMS of GSM and also to similar Short Message Services in other mobile telecommunications systems such as the Digital American Mobile Phone Service (D-AMPS) used in the U.S.A.

When there are several mobile telecommunications systems carriers, (e.g. Telstra, Optus and Vodafone in Australia), the message processing means may comprise a plurality of message processors, one for each SMS carrier.

The service processing means may be arranged to generate time-dependant, location-dependent and/or event dependant messages in accordance with the customer profile of a subscriber. Preferably, the message distribution centre or apparatus includes timing means, such as a real-time clock, for passing real time signals to the service processing means. The real-time signals may be used by the service processing means to trigger the generation of time-dependant messages, or for timing a predetermined period for the evaluation of a trigger for event-dependant or location-dependent messages. The message distribution centre or apparatus preferably includes memory means for storing data received from the at least one information source. The memory means may store current data and previous data for comparison purposes by the service processing means in determining whether an event-dependant message should be generated.

In a preferred embodiment, the service processing means may comprise a plurality of service processors to receive data from an equivalent number of

15

20

25

30

information sources so that a wide variety of information services can be made available for subscribers. The or each service processor is preferably connected to a profile management system which includes or is connected to a customer database containing the customer profiles. The customer database may be maintained separately from the message distribution centre or apparatus containing the service processing means and the message processing means, for instance at a telemarketing centre. The system or apparatus may also include means for connecting the message distribution centre and/or the customer database to the Internet, for instance a World Wide Web Server, so that a subscriber can enter or change details of his or her customer profile via the Internet.

According to a further aspect of the invention there is provided a system for disseminating information from at least one information source containing data to subscribers of a mobile telecommunications network, comprising:

location determining means for determining the location of mobile terminals of particular subscribers of the network;

a message distribution centre connected to or including at least one information source containing data, wherein the message distribution centre includes service processing means for receiving and processing data from said at least one information source to generate location-dependent messages for particular subscribers in accordance with the location of the particular subscribers; and

message processing means for transmitting the information messages to the subscribers.

In the various aspects of the invention, information messages may be transmitted in response to requests from particular subscribers on information from said at least one information source, the request being initiated at any time, from any location or based on any event.

For instance, messages may be transmitted in response to a request from a particular subscriber for information associated with his/her location at the time the request is made.

The system or apparatus may deliver the event-dependent, location-dependent and/or time dependent messages to the subscriber in a menu driven format. The

10

15

20

25

30

menus will be generated by the service processing means in accordance with the customer-defined profile of the subscriber. The menu or menus provide a number of options appropriate to the needs of the subscriber, which options can be selected by the subscriber to obtain more information on a particular item or feature.

The system or apparatus may also provide menus to the subscriber in response to a query from the subscriber, the menus being arranged by the service processing means into appropriate options based on the query.

Further details and features of a preferred embodiment of the present invention will now be described, by way of example only, with reference to the accompanying drawings in which:-

Figure 1 is a schematic diagram of a system for disseminating information in accordance with the invention;

Figure 2 is a block diagram of the message distribution centre of Figure 1; Figure 3 is a flowchart showing the processing of a time-dependent message for transmission to a subscriber;

Figure 4 is a flowchart showing the processing of an event-dependent message for transmission to a subscriber.

The system for disseminating information shown in Figure 1 comprises a message distribution centre 10 connected to a plurality of information sources 20 comprising databases 22 which contain data or information which is updated substantially continuously or at intervals, for instance, stock-market information, lottery results, banking and other financial services, sports information, betting services and traffic information. The message distribution centre (MDC) 10 is also connected via a service connection 24 (e.g. the AUSTPAC X.25 network in Australia) to a plurality of mobile telecommunications network carriers 30, e.g. in Australia Telstra, Optus, Vodaphone, etc., which transmit information messages from the message distribution centre 10 to subscribers of the mobile networks provided with mobile terminals 32 which can receive short messages in text form via a short message service (SMS) provided from a short message service centre (SMS-C) 34 of the network carrier.

In the system of Figure 1, the message distribution centre 10 is connected,

for instance by a dedicated leased telephone line PPP DXL, to a telemarketing centre 40 which provides customer and service administration, including the handling of charging and billing records, customer registration and enquires, and customer requests to change their individual customer profiles. The system may also include a World Wide Web (WWW) server 50 allowing subscribers provided with personal computers (PCs) 52 to interact with the message distribution centre 10 via the Internet. This allows subscribers to perform such activities as on-line registration and service selection, customer profile administration, billing and service enquires and ad-hoc message transmission.

5

10

15

20

25

30

Each telecommunications network 30 has a USSD facilitating node 36 which is an interface that facilitates dialogue and the transmission of Unstructured Supplmentary Services Data (USSD) between a subscriber of that particular network and the message distribution centre 10. One type of USSD facilitating node which may be used in the present invention is Ericsson's Enhanced Services Node (ESN). The node 36 enables messages to be sent and received between the MDC and the subscriber and enables menus to be received by the subscriber. The subscriber can respond by selecting one or more options from the menus depending on the circumstances of the subscriber or in accordance with the subscriber profile. The menus are generated by Unstructured Supplementary Services Data (USSD) so that a particular service, as processed by one of the service processors 12. provides the subscriber with a menu structure that is controlled by the subscriber. The USSD utilises the control channel in GSM networks. Each node 36 is linked to a USSD interface or gateway 44 in the MDC 10 which communicates with each of the service processors 12 and profile management system 14. By way of example, a subscriber wishing to know information about a stock will be presented with a menu giving options to find out more information on that stock. Menus can also be downloaded in situations that are location dependent. A mobile terminal locating means, such as Ericsson's Mobile Positioning Centre (MPC) 38, is located in each of the telecommunications networks 30 for determining the location of a subscriber's mobile terminal within the network on a geographic basis. Each MPC is linked to a location processor 46 in MDC 10.

There are a number of known techniques for locating a subscriber's mobile terminal in terms of its longitudinal and latitude including:-

- identifying the base station of the cell to which the subscriber's terminal is closest;
- 5 comparing the signal strength received by base stations from the terminal over a number of cells:
  - using a reference mobile terminal in a particular cell and comparing the signal strengths measured between the reference mobile terminal and the subscriber's terminal; and
  - using the timing advance (TA) technique for GSM networks to determine the distance between the subscriber terminal and the base station of the cell in which the subscriber is located.

Once the subscriber's terminal has been located, the information is forwarded by the MPC 38 to a location processor 46 in the MDC 10.

Depending upon the location of a subscriber, i.e. longitude and latitude, and on the subscriber's profile, as determined by the Profile Management System 14, the node 36 will trigger the USSD gateway 44, located in the MDC 10, for the service processors 12 to provide the menu structures for the subscriber. These are called profile generated/intelligent services.

## 20 Example of location dependent event

10

15

25

30

A particular subscriber may have a traffic route by which he/she will travel to reach a destination stored in his/her profile and have the service send traffic information on the route at predetermined times. Knowing that the subscriber is on the stored route and the time is for example 8.30am, information about a traffic build-up which is causing delays further along the route can be transmitted to the subscriber in SMS format to alert the subscriber. By using USSD the service can offer a menu of options such as an alternative route, to call somebody to let he/she know that the subscriber will be late for a meeting, or an option to have maps in the subscriber's vicinity, from a directory database, downloaded to the subscriber terminal. More information on each option can be obtained by progressively going through sub-menus.

20

25

30

Alternatively, the system offers the subscriber "go to" services wherein the subscriber can request information at any time whilst travelling, for example, on the above-described route. These services are enabled through the USSD facilitating node 36 and the USSD gateway 44. The information requested by the subscriber and subsequently transmitted to the subscriber is not limited to traffic information but can be from many other databases/sources as previously mentioned. For example, information services that may be requested include:-

- (1) emergencies:- If a subscriber's vehicle has broken down, roadside assistance can be requested wherein the location of the subscriber's vehicle is stored in the relevant service processor and in return, information relating to the position of the nearest available roadside assistant is transmitted to the subscriber. Position requests may also be made in relation to the nearest police vehicle/station, ambulance and towing operators.
- (2) food service guides:- Based on the location of the subscriber, he or 15 she may request information on the location of nearby restaurants, take-away venues, etc.
  - (3) tourism/amusements:- Again, based on the location of the subscriber, if there are particular tourist attractions or amusements nearby, then the location of these or the times that they are open/showing may be transmitted to the subscriber's terminal or called on by request from the subscriber who can go through a series of menus on a particular attraction or amusement.
  - (4) public transport:- Requesting information on taxi services, or booking a taxi, information relating to train and tram timetables for a nearby station/stop or for particular destinations for which train/tram is most feasible to take can be requested or downloaded. Furthermore, information on aircraft such as arrival/departure times and flight numbers of airlines can be requested.
  - (5) petrol/amenities:- The nearest location of petrol stations, fast food outlets, hotels, pubs, etc can be requested.

Any of the above services can offer the telephone number of the particular item of interest requested by the subscriber, wherein the subscriber is connected through to the requested item and dialogue can take place between the subscriber and a representative of the relevant party, e.g. an airline reservation number or the telephone number of the nearest police station. Furthermore, the position of the subscriber can be provided to the called party by passing the calling line identification (CLI) number of the subscriber to a location centre or alternatively, by passing on the subscriber location information during the telephone call.

5

10

15

20

25

30

Referring to Figure 2 of the drawings, the message distribution centre 10 includes a plurality of service processors 12 each connected to a respective one of the information sources 20 for receiving data from the databases 22 of the information source 20, a plurality of message processors 13 each connected to a respective one of the short message service centre (SMS-C) 34, and a profile management system 14 connected to a customer database 42 which may conveniently be located at the telemarketing centre 40, or alternatively at the message distribution centre 10.

Each service processor 12 can access the customer database 42 via the profile management system 14 and is arranged to process the data received from the respective information source 20 to produce information messages for individual subscribers in accordance with the particular customer profile of each subscriber which is stored in the customer database 42. Each information message is passed by the service processor 12 to an appropriate message processor 13 which processes the message into an SMS form suitable for handling by the Short Message Service centre 34 of the particular mobile network carrier 30 to which the subscriber is connected. The appropriate message processor 13 for each subscriber is also determined by the service processor from the customer profile of the subscriber stored in the customer database 42. An SMS information message is then transmitted by the SMS-C 34 to a subscriber's mobile terminal 32 which alerts the subscriber to an incoming message by an audible tone and then displays the SMS message in text form on the display of the subscriber's mobile terminal.

The information messages produced by the service processors may be timedependant, event-dependant or location-dependent. The message distribution centre 10 includes timing means in the form of a real-time clock 15 connected to the service processors 12 so that the service processors 12 can produce the dependant

10

15

20

25

30

messages in accordance with the customer profiles of the subscribers. The message distribution centre 10 may also include monitoring means in the form of an alarm monitor 16 for monitoring the performance of the service processors 12, the message processors 13 and the profile management system 14, and for generating audible and/or visual alarm signals when a malfunction occurs.

The operation of the system to produce time-dependant and event-dependant messages will now be described, by way of example only, in connection with a stock market and financial information broadcast service, which is one use of the system. The system will receive a data feed directly from a commercial stock market and financial information source, such as the "DF2" data feed signal provided in Australia by AAP Information Services Pty Ltd (AAP). The DF2 signal contains a large quantity of diverse information which is updated substantially continuously or at regular intervals, including stocks, indices, interest rates, currencies and company news. The information broadcast service will preferably be available to subscribers of a plurality of mobile telecommunications network carriers. In Australia there are currently three main mobile network carriers, Telstra, Optus and Vodafone, each of which use GSM (Global System for Mobile) digital mobile telephone, an Internationally recognised standard digital telephone system which provides a Short Message Service (SMS) facility. Any subscriber of one of the SMS carriers and having the facility to receive SMS text messages on his or her mobile terminal may apply to become a customer of the information broadcast service via the telemarketing centre, or alternatively via the Internet and the World Wide Web Server 50. The telemarketing centre, including the customer database, is set up to manage, maintain and administer customer information, including contact details, billing details and customer specific stock market information selections and related notification and trigger events. Customer administration and service connections, alterations and disconnections may be performed through a front end, PC-based system.

It is envisaged that a range of services will be available to customers, including: Individual stock prices; Indices; Interest Rates; and Currencies.

In order to offer a "personalised" service, each customer's record may have

10

15

the option of recording a broker's name and/or telephone number for appendage to the SMS message.

## 1. Individual Stock Prices

Customers will be asked to advise the stocks they wish to monitor. Stocks can be nominated by their full/partial name (e.g. Mount Isa Mines), or via their stock code (e.g. MIM). The system should search a valid database of stock codes to ensure valid entries. For each nominated stock, the customer can request one of two service levels; (a) current price, or (b) percentage change from last quote. This procedure will repeat until all stocks have been nominated by the customer.

## (a) current price (time-dependant reporting)

For these stocks, the customer can request to receive time-dependant messages at a given delivery frequency and interval. This can consist of any combination of time, time interval or day, and may also exclude days or dates (eg. "not on weekends" or "not on 25th Dec").

### Examples

- "please send me information at 9am each weekday"
- "Please send me information every hour starting at 9am and finishing at 3pm on weekdays".
- The way in which time dependant messages may be processed will now be described with reference to the flowchart of Figure 3. The service processor 12 connected to the AAP Information Source receives data from the source which is updated substantially continuously or at regular intervals as indicated by 110. The service processor 12 stores the data received as indicated by 112. The service processor also accesses customer profiles stored in the customer database 42 via the profile management system 14 as indicated by 114 and compares the stored data from the information source with the customer profiles as indicated by 116. The service processor 12 checks whether a customer has requested information on a

particular stock as indicated by 118. If the customer has not requested information on a stock no message is generated for that stock as indicated by 120. The clock 15 continuously sends real time signals to the service processor (as indicated by 115) and if the customer has requested information on a particular stock, the customer request time (e.g. 9am each weekday) is compared with the real time signal as indicated by 122 to determine whether it is time to send an information message to the customer as indicated by 124. No message is sent (as indicated by 126) until it is time to send a message and then the service processor 12 passes the message to the appropriate message processor 13 for the customer's carrier network as indicated by 128. The message processor then processes the message into the appropriate SMS form for the customer's carrier network and sends the message to the SMS centre 34 as indicated by 130.

## (b) percentage change ("event dependant" reporting)

For these stocks, a customer may request to receive event-dependant messages by providing a percentage fluctuation amount (positive and/or negative) from a previous quote. This will act as the trigger or event which will spawn a message to be delivered. The customer may also request exclusion times, days, etc as for service (a) above.

### Examples

20

25

15

10

- "Please notify me when MIM stocks fluctuate by +/- 20% starting from 9am and finishing at 4pm and only on weekdays
- "Please notify me when MIM stocks fluctuate by -20% starting from 9am and finishing at 2pm and only on weekends"

The way in which event-dependant messages may be processed will now be described with reference to the flowchart of Figure 4. The service processor 12 connected to the AAP information source continuously receives data from the source as indicated by 210. The service processor stores the current data and previous data as indicated by 212 and receives time signals from the real time clock

15 as indicated by 215 so that is able to compare the current data with the previous data over certain time periods. The service processor 12 also accesses customer profiles stored in the customer database 42 via the profile management system 14 as indicated by 214 and compares the stored data from the information source with the customer profiles as indicated by 116. The service processor checks whether a customer has requested information on a particular stock as indicated by 218. If the customer has not requested information on a stock no message is generated for that stock as indicated by 220. If the customer has requested to receive eventdependant messages on a particular stock, e.g. the customer has requested to be notified if a certain stock fluctuates by more than a predetermined percentage in a predetermined time period, the current data is compared with the previous data for that stock over the requested period as indicated by 222 to ascertain whether the value of the stock has fluctuated by the requested percentage over the requested period as indicated by 224. If so, the service processor 12 passes the information message to the appropriate processor 13 as indicated by 226. Otherwise, no message is produced (220). The message processor 13 for the customer's carrier network then processes the message into an appropriate SMS form for the carrier network and sends the message to the appropriate SMS centre 34 as indicated by 230.

#### 20 2. Indices

10

15

The data feed from the Information Source(s) to the service processor(s) may also provide information on stock market indices such as the All Ordinaries Index in Australia, Dow Jones Index, etc. Certain customers may wish to be notified of this information at predetermined time/day intervals. This service is very similar to the stock price service described above. Similar ontions should be offered to customers.

#### Examples

- (a) time dependant
  - "Please notify me of the all ordinaries index at 9am and finishing at 4pm each weekday"

25

15

20

25

 "Please notify me of the Dow Jones index at 2 hourly intervals starting at 9am and finishing at 4pm each weekday"

## (b) event dependant

 "Please notify me when the Dow Jones index fluctuates by more than +/- 20% from the last quote from 9am and finishing at 5pm on weekdays"

Such time dependant and event dependant messages may be processed by the message distribution centre in similar manner to the individual stock information messages 1(a) and 1(b) above as described with reference to Figures 3 and 4.

## 10 3. Interest Rates

An interest rate delivery service may also be provided to deliver nominated interest rates to customers using either predetermined delivery times/intervals or event dependant delivery triggers (as for the services 1 and 2 above)

### Examples

 "Please send me information regarding interest rate 'x' when it fluxuates by 17% on weekdays starting at 10am and finishing at 3pm".

### 3. Currencies

A currency delivery service may also be provided to deliver nominated currency figures to customers using either predefined delivery times/intervals or event dependant delivery triggers (as for the services 1 and 2 above)

### Examples

 "Please send me information regarding the current value of the US Dollar at half hourly intervals on weekdays starting at 11am and finishing at 4pm" WO 97/41654 PCT/AU97/00260

5

16

Although Figures 3 and 4 relate to the dissemination of stockmarket and financial information, it will be appreciated that many other types of information may be disseminated in the system of the present invention and various other modifications and alterations may be made to the method and system described above without departing from the scope or spirit of the invention.

### Claims

10

25

 A method of disseminating information from at least one information source containing data which is updated continuously or at intervals to subscribers of a telecommunications network comprising the steps of:

5 storing customer-defined profiles of subscribers of the network;

receiving, at a message distribution centre, data from said information source which is updated continuously or at intervals;

processing said data to produce information messages for particular subscribers in accordance with a stored customer-defined profile of each subscriber;

transmitting said information messages to particular subscribers in accordance with the stored customer-defined profile of each subscriber.

- A method according to claim 1 wherein the information messages are transmitted to a particular subscriber at predetermined times or intervals of time in accordance with the customer-defined profile of said particular subscriber.
- 15 3. A method according to claim 1 wherein the information messages are transmitted to a particular subscriber upon the occurrence of predetermined events which are triggered in accordance with the customer-defined profile of said particular subscriber.
- 4. A method according to claim 1 wherein the information messages are transmitted to a particular subscriber dependent upon the location of said particular subscriber in accordance with the customer-defined profile of said particular subscriber.
  - A method according to any one of the preceding claims wherein the information messages are transmitted in a menu-driven format in accordance with the customer-defined profile of a particular subscriber.

- 6. A method according to claim 1 wherein the information messages are transmitted in response to a request from a particular subscriber on information from said at least one information source, the request being initiated at any time, from any location or based on an event.
- 5 7. A method according to claim 6 wherein the information messages are transmitted in a menu-driven format in accordance with said request of the particular subscriber.
  - A method according to any one of the preceding claims wherein the information messages are transmitted via a mobile telecommunications network carrier to subscribers of the network equipped with mobile terminals.

15

20

- A method according to claim 8 wherein the information messages are transmitted in the form of short message service (SMS) text messages.
- 10. A system for disseminating information to subscribers of a telecommunications network comprising: a message distribution centre connected to or including at least one information source containing data which is updated substantially continuously or at intervals; a database of stored customer-defined profiles of subscribers of the network; wherein the message distribution centre includes service processing means for accessing the database of stored customer-defined profiles and arranged to process data from said at least one information source to generate information messages for a particular subscriber in accordance with the customer-defined profile of said subscriber; and message processing means for transmitting the information messages to the subscribers.
- A system according to claim 10 wherein the system includes timing means and the information messages are transmitted to particular subscribers at predetermined times or intervals of time in accordance with the customer-defined profile of each particular subscriber.

WO 97/41654 PCT/AU97/00260

19

- 12. A system according to claim 10 wherein the system includes eventprocessing means and the information messages are transmitted to particular subscribers upon the occurrence of predetermined events which are triggered in accordance with the customer-defined profile of each particular subscriber.
- 5 13. A system according to claim 10 wherein the system includes location processing means and the information messages are transmitted to a particular subscriber dependent upon the location of said particular subscriber in accordance with the customer-defined profile of said particular subscriber.
- 14. A system according to any one of claims 10 to 13 wherein the service processing means includes menu-generating means for producing information messages in a menu-driven format for transmission to subscribers of the network.
  - 15. A system according to claim 10 wherein the information messages are transmitted in response to a request from a particular subscriber on information from said at least one information source, the request being initiated at any time, from any location or based on an event.

15

25

- 16. A system according to any one of claims 10 to 15 wherein the information messages are transmitted via a mobile telecommunications network carrier to subscribers of the network equipped with mobile terminals.
- 17. A system according to claim 16 wherein the information messages are transmitted in the form of short message service (SMS) text messages from the message processing means to a subscriber's terminal via a short message service centre (SMS-C).
  - 18. A system according to claim 16 or claim 17 wherein the system includes mobile positioning means for determining the location of a subscriber's terminal, said mobile positioning means transmitting the location of a subscriber's terminal

to a location processor in said message distribution centre.

- 19. A system according to any one of claims 10 to 18 wherein the message distribution centre includes a plurality of service processors to receive data from a corresponding number of information sources.
- 5 20. A system according to any one of claims 10 to 19 wherein the or each service processor is connected to a profile management system which includes or is connected to a customer database containing the customer-defined profiles.
- 21. A system according to any one of claims 10 to 20 for transmitting information to subscribers of a plurality of mobile telecommunications networks wherein the message processing means comprises a plurality of message processors, one for each telecommunications network carrier used in the system, each network carrier having an associated short message service centre.
- 22. Apparatus for disseminating information from at least one information source containing data which is updated continuously or at intervals to subscribers of a mobile telecommunications network, comprising service processing means for receiving data from said at least one information source and for accessing a database of stored customer-defined profiles, said service processing means being arranged to process data received from said at least one information source to generate information messages for a particular subscriber in accordance with the customer-defined profile of said subscriber; and message processing means for transmitting the information messages to the subscribers in the form of Short Message Service (SMS) messages for reception by mobile terminals of the subscribers.
- 23. Apparatus according to claim 22 wherein the apparatus includes timing means and the service processing means is arranged to generate time-dependent information messages for transmission to particular subscribers at predetermined

WO 97/41654 PCT/AU97/00260

21

times or intervals of time in accordance with the customer-defined profile of each particular subscriber.

24. Apparatus according to claim 22 wherein the service processing means is arranged to generate event-dependent information messages for transmission to particular subscribers upon the occurrence of predetermined events which are triggered in accordance with the customer-defined profile of each particular subscriber.

5

10

20

- 25. Apparatus according to claim 22 wherein the apparatus includes location processing means for processing location signals representing the location of particular subscribers and the service processing means is arranged to generate location dependent information messages for transmission to particular subscribers in accordance with the customer-defined profile of each particular subscriber.
- 26. Apparatus according to any one of claims 22 to 25 wherein the apparatus includes an interface for receiving requests from subscribers and the service processing means is arranged to generate information messages for transmission in response to a request from a particular subscriber on information from said at least one information source.
- 27. Apparatus according to any one of claims 22 to 26 wherein the service processing means includes menu-generating means for generating information messages in a menu-driven format.
- 28. Apparatus according to any one of claims 22 to 27 wherein said service processing means comprises a plurality of service processors to receive data from a corresponding number of information sources.
- Apparatus according to any one of claims 22 to 28 wherein the or each
   service processor is connected to a profile management system which includes or

is connected to a customer database containing the customer-defined profiles.


- 30. Apparatus according to any one of claims 22 to 29 for disseminating information to subscribers of a plurality of mobile telecommunications networks wherein the message processing means comprises a plurality of message processors, one for each telecommunications network carrier.
- 31. A system for disseminating information from at least one information source containing data to subscribers of a mobile telecommunications network, comprising: location determining means for determining the location of mobile terminals of particular subscribers of the network;
- a message distribution centre connected to or including at least one information source containing data, wherein the message distribution centre includes service processing means for receiving and processing data from said at least one information source to generate location-dependent messages for particular subscribers in accordance with the location of the particular subscribers; and

10


15


20

- message processing means for transmitting the information messages to the subscribers
- 32. A system according to claim 31 wherein the information messages are transmitted in response to requests from particular subscribers on information associated with the location of the particular subscriber at the time the request is made.
- 33. A system according to claim 32 wherein the service processing means includes menu-generating means for generating the information messages in a menu-driven format.

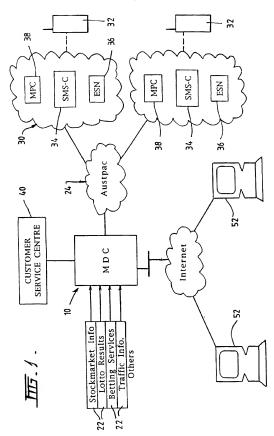


SUBSTITUTE SHEET (Rule 26)

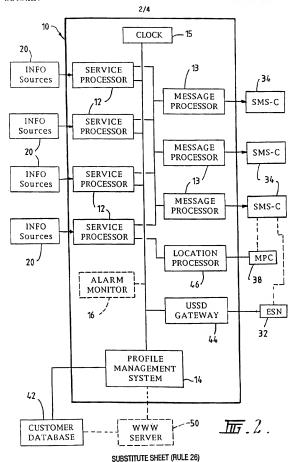

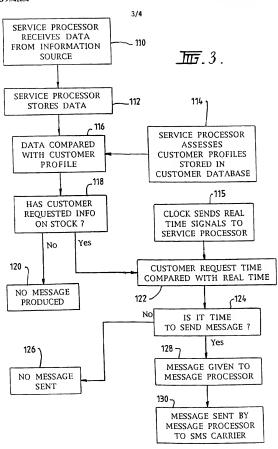

SUBSTITUTE SHEET (Rule 26)

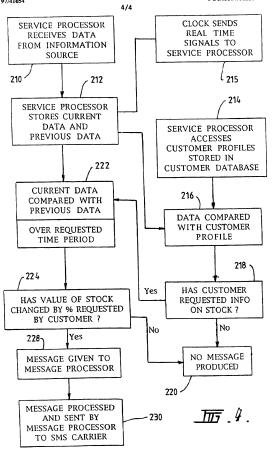

SUBSTITUTE SHEET (Rule 26)

## INTERNATIONAL SEARCH REPORT

International Application No

		PCI/AU	97/00260			
	CLASSIFICATION OF SUBJECT MATTER					
Int Cl <sup>6</sup> H04	nt Cl <sup>6</sup> H04H 1/00, 1/08, H04L 12/16, 12/18, H04Q 7/20, H04B 7/26					
	nternational Patent Classification (IPC) or to both no	ational classification and IPC				
	FIELDS SEARCHED					
Minimum docur IPC : H04H	mentation searched (classification system followed by class 1/00, 1/08, H04L 12/16, 12/18, H04M 3/42, 11/	ssification symbols) /08, H04Q 3/64, 7/20, H04B 7/26				
Documentation AU : IPC as	searched other than minimum documentation to the extendabove	nt that such documents are included in the	e fields searched			
DERWENT:	base consulted during the international search (name of di (message: or information or data) and (distribu for subscriber#) and (profile# or schedule#)	ata base and, where practicable, search te ut: or broadcast: or multicast: or c	erms used) disseminat:) and (user			
c.	DOCUMENTS CONSIDERED TO BE RELEVANT					
Category*	Citation of document, with indication, where appre	opriate, of the relevant passages	Relevant to claim No.			
X X P,X	WO 94/30000 A (NEW BRUNSWICK TELEPHO 22 December 1994 Page 11 line 33 - page 20 line 15 AU 81845/94 A (AT & T CORP) 13 July 1995 Figure 6, page 6 line 29 - Page 7 line 27, page 10 DE 4440419 A (T. ISSING et al.) 9 May 1996 Column 3 line 5 - column 4 line 7, column 6 lines	lines 11-31, the abstract	1-7, 10-15, 19, 20 1, 10 1, 6, 10, 15			
	Further documents are listed in the continuation of Box C	X See patent family annex				
"A" document of the control of the c	all categories of cited documents:  ment defining the general state of the art which is onsidered to be of particular relevance  "X" redocument but published on or after the national filing date ment which may throw doubts on priority claim(s) inch is cited to establish the publication date of  "Y re reitation or other special reason (as specified) ment referring to an oral disclosure, use, exhibition her means ment published prior to the international filing date  "Externation of the priority date claimed  "A"	priority date and not in conflict with understand the principle or theory us document of particular relevance; th be considered novel or cannot be co- tinventive step when the document is document of particular relevance; the be considered to involve an inventiv combined with one or more other su combination being obvious to a personal combination being obvious to a personal transport of the conflict of the conflict of the consideration of the conflict of the conflict of the conflict of the consideration of the conflict of the con	the application but cited to inderlying the invention ne claimed invention cannot insidered to involve an staken alone to claimed invention cannot we step when the document is net documents, such son skilled in the art			
	tual completion of the international search	Date of mailing of the international seas	rch report			
20 May 1997		0 4 JUN	1997			
PO BOX 200 WODEN AC	T 2606	Authorized officer  J. LAW				
AUSTRALIA	Facsimile No.: (06) 285 3929	Telephone No.: (06) 283 2179				

## INTERNATIONAL SEARCH REPORT Information on patent family members

International Application No.
PCT/AU 97/00260

This Annex lists the known "A" publication level patent family members relating to the patent documents cited in the above-mentioned international search report. The Australian Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent Do	cument Cited in Search Report			Paten	t Family Member		
wo	9430000	AU JP	70653/94 9500500	CA	2125843	EP	709011
AU	81845/94	JР	7221851				
DE	4440419						
							END OF AN